


ADA Mesh grating - stainless steel

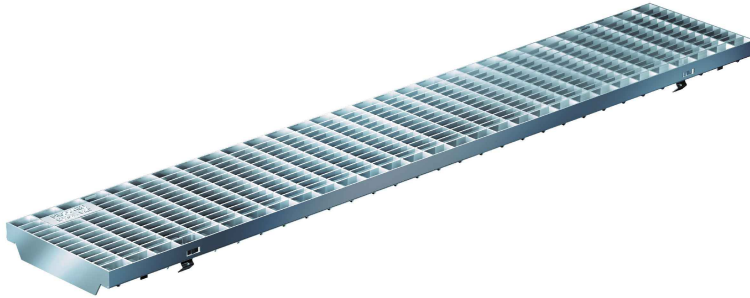

Product Features:

- Certified as per European standard EN 1433
- Load Class C 250 kN - 56,200 lbs.
- Uses fiX self-locking system.
- Suitable to use with NW150 channels.
- Manufactured from stainless steel AISI no. 1.4301 (grade 304)
- Complies with ADA - American Disabilities Act.
- Suitable to use with Anti-vandalism device to prevent theft.

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings BG-FILCOTEN® pro E NW 150 (6") with fiX self-locking system.

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m
							Lbs	Kg		
○	17015322	ADA Mesh grating	stainless steel	39.40"/6.77"/0.78" 1000/172/20	C 250 kN	MW1.18" x 0.39" (MW30x10mm)	15.21	6.9	198.40	1,280
○	17015323	ADA Mesh grating	stainless steel	19.70"/6.77"/0.78" 500/172/20	C 250 kN	MW1.18" x 0.39" (MW30x10mm)	7.94	3.6	192.20	1,240

Specification: BG-FILCOTEN pro-tec NW150, heavy duty, (Load Class C 250 kN), stainless steel AISI no. 1.4301 (grade 304), reinforced grate is 6.77" (172mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 15.21 lbs (6.9 kg). The grate has 0.39" (10mm) wide, 1.18" (30mm) long slots and is ADA compliant and Class C load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. stainless steel manufactured and tested according to EN1433 - CE certified.

C250kN MW30/10: E 17015322 (17015323)

