

Ductile iron slotted grating**Product Features:**

- Certified to EN 1433 Load
- Class E 600 kN (134,800 lbs)
- Uses fiX self-locking system.
- Suitable to use with NW200 channels.
- Manufactured from ductile iron.

Installation:



- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings BG-FILCOTEN® pro V NW 200 (8") with fiX self-locking system.

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross- section sq.inches/m	Inlet cross- section cm2/m
							Lbs	Kg		
○	17020105	Ductile iron slotted grating	ductile iron	19.70"/8.74"/0.78" 500/222/20	E 600 kN	0.55" wide x 7.871" slots (SW14x200 mm)	19.62	8.9	149.58	965

Specification: BG-FILCOTEN pro-tec NW200, extra heavy duty, (Load Class E 600 kN), ductile iron, reinforced grate is 8.74" (222mm) wide, 19.70" (500mm) long, 0.78" (20mm) high, weighing 18.96 lbs (8.6 kg). The grate has 0.55" (14mm) wide, 7.87" (200mm) long slot and is Class E load rated - for commercial solid tire traffic patterns, and impacts from steel struts or metal wheels (forklifts). The grate is secured to the body with four point fiX self-locking (snap-on) system. Ductile iron manufactured and tested according to EN1433 - CE certified.

E600kN SW14/200: GJS 17020105

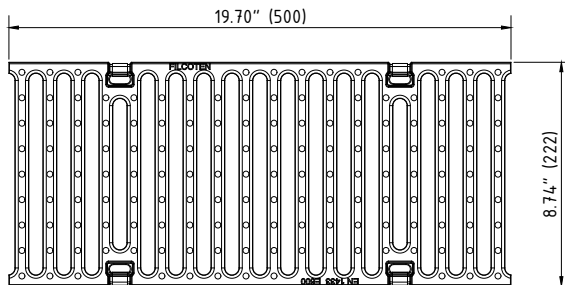

B (1 : 2)

