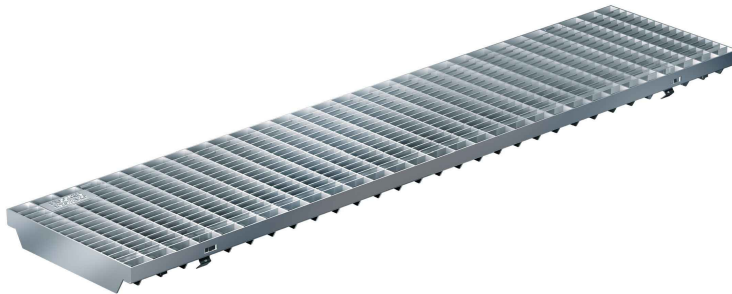


ADA Mesh grating - stainless steel**Product Features:**

- Certified to EN 1433
- Load Class D 400 kN (89,920 lbs)
- Uses fiX self-locking system.
- Suitable to use with NW200 channels.
- Manufactured from stainless steel AISI no. 1.4301 (grade 304)
- Complies with ADA - American Disabilities Act.

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings BG-FILCOTEN® pro E NW 200 (8") with fiX self-locking system.

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m
							Lbs	Kg		
○	17020326	ADA Mesh grating	stainless steel	39.40"/8.74"/0.78" 1000/222/20	D 400 kN	MW 0.98" x 0.39" (MW25x10mm)	34.61	15.7	217.0	1,400
○	17020327	ADA Mesh grating	stainless steel	19.70"/8.74"/0.78" 500/222/20	D 400 kN	MW 0.98" x 0.39" (MW25x10mm)	17.64	8.0	215.45	1390

Specification: BG-FILCOTEN pro-tec NW200, extra heavy duty, (Load Class D 400 kN), stainless steel AISI no. 1.4301 (grade 304), reinforced grate is 8.74" (222mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 34.61 lbs (15.7 kg). The grate has 0.39" (10mm) wide, 0.98" (25mm) long mesh and is ADA compliant and Class D load rated - for pneumatic forklift traffic, roads and highways. The grate is secured to the body with four point fiX self-locking (snap-on) system. stainless steel manufactured and tested according to EN1433 - CE certified.

D400kN MW25/10: E 17020326 (17020327)

