


**ADA Mesh grating - Galvanized steel**

**Product Features:**

- Certified to EN 1433
- Load Class C 250 kN 56,200 lbs per foot.
- Uses 4-point bolting system.
- Suitable to use with NW300 channels
- Manufactured from galvanized steel
- Hot-Dip galvanized material
- Complies with ADA - American Disabilities Act.

**Installation:**

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

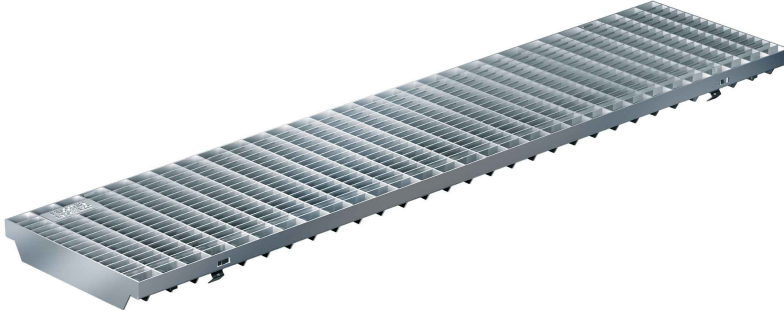

Gratings BG-FILCOTEN® pro V NW 300 (12") with 4-point bolting system.

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m	
							Lbs	Kg			
○	17030222	ADA Mesh grating	galvanized steel	39.40"/13.66"/0.98" 1000/347/25	C 250 kN	MW1.18" x 0.39" (MW30x10mm)	50.92	23.1	357.27	2,305	
○	17030223	ADA Mesh grating	galvanized steel	19.70"/13.66"/0.98" 500/347/25	C 250 kN	MW1.18" x 0.39" (MW30x10mm)	25.57	11.6	355.72	2,295	
○	32112	Bolts/nuts kit for class C galvanized mesh grating (4 pcs. required for 500mm grating)							0.2		

**Specification:** BG-FILCOTEN pro-V NW300, extra heavy duty (Load Class C 250 kN), galvanized steel, reinforced grate is 13.66" (347mm) wide, 39.40" (1000mm) long, 0.98" (25mm) high, weighing 50.92 lbs (23.1 kg). The grate has 0.39" (10mm) wide, 1.18" (30mm) long mesh and is ADA compliant and Class C load rated - for commercial applications. The grate is secured to the body with four point bolting system (item# 32112). Galvanized steel manufactured and tested according to EN1433 - CE certified.

C250kN MW30/10: G 17030222 (17030223)

