


ADA Mesh grating - Stainless steel

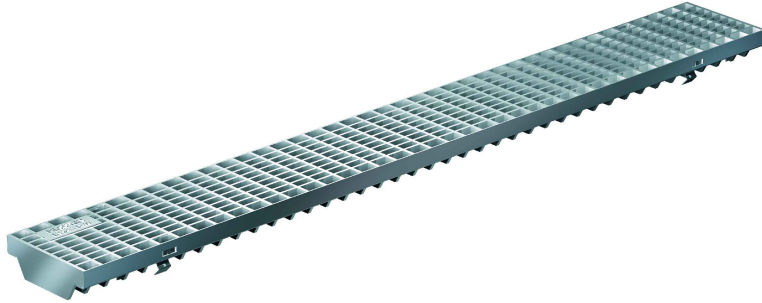

Product Features:

- Certified to EN 1433
- Load Class D 400 kN - 89,920 lbs
- Uses fiX self-locking system
- Suitable to use with NW100 channels
- Manufactured from Grade 304 (1.4301) stainless steel
- Complies with ADA - American Disabilities Act

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings BG-BG-FILCOTEN® pro – E NW 100 (4") with fiX self-locking system.

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m
							Lbs	Kg		
○	17010326	ADA Mesh grating	stainless steel	39.40"/4.80"/0.78" 1000/122/20	D 400 kN	MW0.98" x 0.39" (MW25x10mm)	16.31	7.4	130.20	840
○	17010327	ADA Mesh grating	stainless steel	19.70"/4.80"/0.78" 500/122/20	D 400 kN	MW0.98" x 0.39" (MW25x10mm)	8.23	3.8	127.10	820

Specification: BG-FILCOTEN pro-E NW100, heavy duty, (Load Class C 250 kN), stainless steel (Type 304), reinforced mesh grate is 4.80" (122mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 7.28 lbs (3.3 kg). The grate has 0.39" (10mm) wide, 1.18" (30mm) long slots and is ADA compliant and compliant Class D load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. Stainless steel manufactured and tested according to EN1433 - CE certified.

D400kN MW30/10: E 17010326 (17010327),

